


# N25 DIGITAL PANEL METERS

## FEATURES:




## INPUTS:

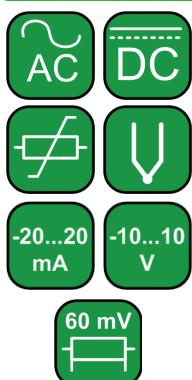

## OUTPUTS:



## GALVANIC ISOLATION:



### Contact Details:

Rishabh Instruments Pvt Ltd  
F-31, MIDC, Satpur  
Nashik-422007  
**INDIA**

Phone: +91 253 2202028


exp.marketing@rishabh.co.in  
marketing@rishabh.co.in

[www.rishabh.co.in](http://www.rishabh.co.in)



- Destined for measurement of d.c. voltage or d.c. current, temperature through Pt100 resistance thermometers, J, K thermocouples, a.c. voltage and a.c. current.
- 5 LED digit displays with 14 mm digit high.
- Parameters programmable by PD14 programmer:
  - precision of displayed results (decimal point),
  - measurement averaging time,
  - recounting of indications (individual characteristic),
  - automatic or manual compensation: cold junction temperature for measurement with thermocouples or wire resistance for measurement with Pt100 (N25T).

## EXAMPLE OF APPLICATION

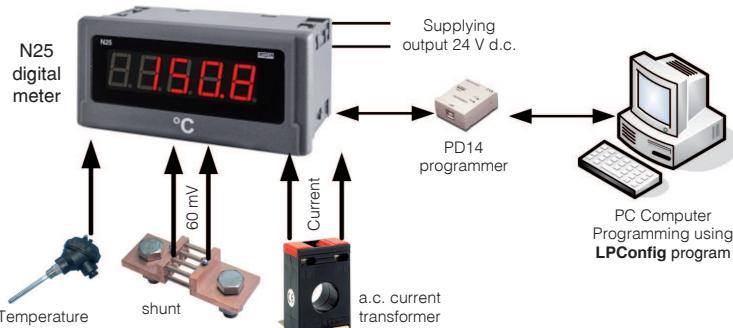

Measurement and display:  
 - temperature  
 - analog signals  
 - d.c. current and voltage  
 - rms current and voltage.


## INPUTS

Type	Measuring ranges		Parameters	Overloads	Errors			
N25S	<u>-11 mV...-10 mV...60 mV...66 mV</u>		Input resistance >1 MΩ	Short duration overload (1s): - voltage input: 10 Un - current input: 5 In Sustained overload: 110% Un, 110% In	<b>Basic error:</b> $\pm (0.2\% \text{ of range} + 1 \text{ digit})$ <b>Additional error</b> from ambient temperature changes: $\pm (50\% \text{ of basic error}/10K)$			
	<u>-66 mV...-60 mV...60 mV...66 mV</u>							
	<u>-0.5 V...0 V...10 V...11 V</u>							
	<u>-11 V...-10 V...10 V...11 V</u>		Input resistance 10 Ω $\pm 1\%$					
	<u>-1 mA...0 mA...20 mA...22 mA</u>							
	<u>3.6 mA...4 mA...20 mA...22 mA</u>		Input resistance 10 Ω $\pm 1\%$					
N25T	Pt100	<u>-50°C...150°C</u>	Current flowing through the sensor: < 300 μA. Resistance of wires connecting RTD with the meter: - max 5 Ω (per wire) for automatic compensation - max 10 Ω (per wire) for manual compensation	Short duration overload (1s) Input of sensors: 30 V	<b>Basic error:</b> $\pm (0.2\% \text{ of range} + 1 \text{ digit})$ <b>Additional errors:</b> <ul style="list-style-type: none"> <li>compensation of cold junction temperature changes: <math>\pm 0.2\%</math> of range,</li> <li>from ambient temperature changes: <math>\pm (50\% \text{ of basic error}/10K)</math>.</li> </ul>			
		<u>-50°C...400°C</u>						
	Thermo-couple J	<u>-50°C...1200°C</u>						
	Thermo-couple K	<u>-50°C...1370°C</u>						
N25Z	<u>1...100...120 V a.c.</u>		Input resistance > 2 MΩ	Short term overload (1s): voltage input: 2 Un (< 1000V), current input: 10 In Sustained overload: 150% Un (for 400 V input), 120% (for remaining inputs), 120% In	<b>Basic error:</b> <ul style="list-style-type: none"> <li>voltage and current: <math>\pm (0.5\% \text{ of range} + 1 \text{ digit})</math> in frequency range 20...500 Hz</li> <li>frequency: <math>\pm (0.02\% \text{ of range} + 1 \text{ digit})</math></li> </ul> <b>Additional error</b> from ambient temperature changes: $\pm (50\% \text{ of basic error}/10K)$			
	<u>2.5...250...300 V a.c.</u>							
	<u>4...400...600 V a.c.</u>							
	<u>20...500 Hz (in voltage range: 24...480 V)</u>							
N25H	<u>0.01...1...1.2 A a.c.</u>		Input resistance 10 mΩ $\pm 10\%$	Short term overload (1s): voltage input: 2 Un (< 1000V), current input: 10 In Sustained overload: 150% Un (for $\pm 400$ V input), 120% (for remaining inputs), 120% In	<b>Basic error:</b> <ul style="list-style-type: none"> <li>voltage and current: <math>\pm (0.5\% \text{ of range} + 1 \text{ digit})</math> in frequency range 20...500 Hz</li> <li>frequency: <math>\pm (0.02\% \text{ of range} + 1 \text{ digit})</math></li> </ul> <b>Additional error</b> from ambient temperature changes: $\pm (50\% \text{ of basic error}/10K)$			
	<u>0.05...5...6 A a.c.</u>							
	<u>0...100...110 V d.c.</u>							
	<u>0...250...275 V d.c.</u>							
<b>OUTPUTS</b>								
For N25S and N25T		Output for supply external transducers		24 V $\pm 5\%$ , 30 mA				

EXTERNAL FEATURES		
Weight	< 0.25 kg	
Overall dimensions	96 x 48 x 64 mm with terminals	
Protection grade (acc. to EN 60529)	ensured by the housing: IP65	from the terminal side: IP 20
Display	5-digit LED display, 14 mm high, red colour	indication range: -19999...99999

RATED OPERATING CONDITIONS		
Supply voltage	230 V ± 10% a.c. (45...65 Hz); 110 V ± 10% a.c. (45...65 Hz) 24 V ± 10% a.c. (45...65 Hz); 85...253 V a.c. (40...400 Hz) or d.c.; 20...40 V a.c. (40...400 Hz) or d.c.	input power consumption: 6 VA
Temperature	ambient: -10...23...55°C	storage: -25...85 °C
Relative humidity	≤ 95%	condensation inadmissible
Operating position	any	
Preheating time	30 min	
Averaging time	≥ 0.5 s	1 second default set

SAFETY AND COMPATIBILITY REQUIREMENTS		
Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Isolation between circuits	basic	
Pollution grade	2	
Installation category	III (for the 400 V option - category II)	acc. to EN 61010-1
Maximal phase-to-earth operating voltage	for supply circuits: 300 V, for measuring circuits: 600 V - cat. II for other circuits: 50 V	
Altitude above sea level	< 2000 m	

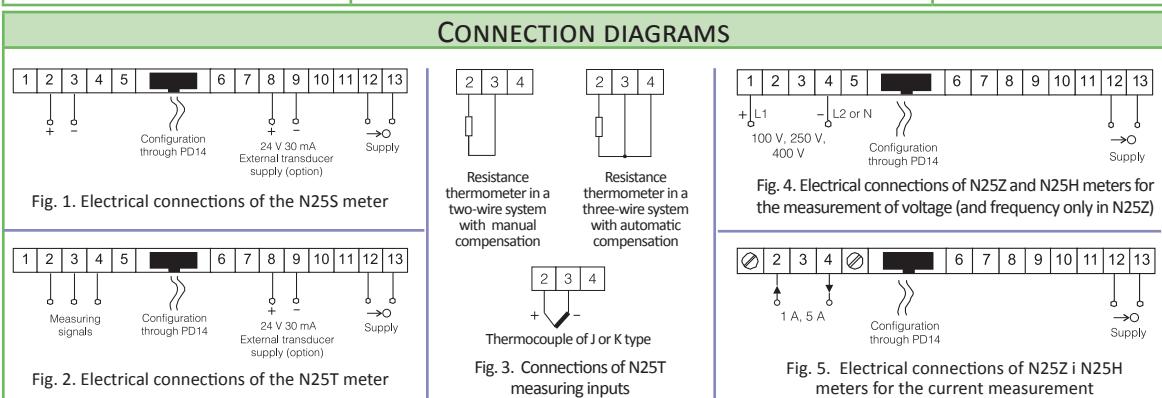

ORDERING							
TABLE 1. ORDERING CODES:							
N25 -	X	X	X	XX	XX	X	X
<b>Input kind:</b>							
standard: voltage, current	S						
temperature: thermocouples, resistance thermometers	T						
a.c. signals	Z						
d.c. signals: high voltage and high current	H						
<b>Input:</b> see table 2			X				
<b>Supply:</b>							
230 V a.c.			1				
110 V a.c.			2				
24 V a.c.			3				
85...253 V a.c./d.c. with supply output 24 V/30 mA*			4				
20...40 V a.c./d.c. with supply output 24 V/30 mA*			5				
<b>Unit:</b> see table 3			XX				
<b>Version:</b>				00			
standard							
non-standard settings				NS			
custom-made**				XX			
<b>Language:</b>					P		
Polish					E		
English					X		
other**							
<b>Acceptance tests:</b>							
without extra requirements			0				
with an extra quality inspection certificate			1				
acc. to customer's request**			X				

\* - the output is only in N25S and N25T meters  
 \*\* - after agreeing with the manufacturer

TABLE 2. INPUT SIGNALS					
Nr	N25S	N25T	N25Z	N25H	
1	0...20 mA	Pt100: -50...150°C	100 V a.c.	±100 V d.c.	
2	4...20 mA	Pt100: -50...400°C	250 V a.c.	±250 V d.c.	
3	0...60 mV	Thermocouple J	400 V a.c.	±400 V d.c.	
4	0...10 V	Thermocouple K	1 A a.c.	±1 A d.c.	
5	± 60 mV		5 A a.c.	±5 A d.c.	
6	± 10 V		20...500 Hz	0...100 V d.c.	
7				0...250 V d.c.	

TABLE 3. CODES OF PRINTED UNITS:					
Code	Unit	Code	Unit	Code	Unit
00	without unit	06	mA	12	bar
01	°C	07	kA	13	kPa
02	%	08	kV	14	MPa
03	A	09	Hz		
04	V	10	turns	XX	on order
05	mV	11	rpm		

TABLE 4. EXAMPLE OF NON-STANDARD SETTINGS:					
Parameter	Range/Value				
Decimal point	000,0 for I, U				
Averaging time	1 s				
Upper measurement overflow	99999				
Lower measurement overflow	-19999				
Individual characteristic	enabled				
Parameter a of the individual characteristic	5				
Parameter b of the individual characteristic	0				

**Order example 1 :**  
 The code N25-Z-2 1 04 0 E 0 means:  
**N25Z** - digital meter for a.c. signals  
 2 - input: 250 V a.c.  
 1 - supply: 230 V a.c.  
 04 - unit: V  
 00 - standard version  
 E - English language  
 0 - without extra requirements

**Order example 2 :**  
 The code N25-S-1 4 02 E 1 means:  
**N25S** - digital meter for d.c. signal  
 1 - input: 0...20mA  
 4 - supply: 85...253 V a.c.  
 02 - unit: %  
 NS - non-standard settings, display range:  
 0...100,0  
 E - English language  
 1 - with an extra quality inspection certificate

## SEE ALSO:

### LPConfig

Free LPConfig software for easy programming of RISHABH - products Available on our website



PD14 programmer - unit for programming RISHABH - products with USB connection, LPCon compatible.



For more information about RISHABH products please visit our website: [www.rishabh.co.in](http://www.rishabh.co.in)

## Contact Details:

Rishabh Instruments Pvt Ltd  
 F-31, MIDC, Satpur  
 Nashik-422007  
 INDIA

Phone: +91 253 2202028

exp.marketing@rishabh.co.in  
 marketing@rishabh.co.in

[www.rishabh.co.in](http://www.rishabh.co.in)