

**Price List**  
**- New Products for Final Distribution**

**Maximum Retail Prices**  
Effective from 21-12-2015



## MCBs (Miniature Circuit Breakers) : 80A-125A

### Range Highlights

- Short circuit Breaking Capacity - 15kA (IEC/EN 60947-2)
- C & D Characteristics
- Available in SP, DP, TP and FP
- Suitable for Isolation as per IS/IEC 60947-1
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories

Rating	Module	C Curve CAT Nos.	M.R.P. (₹) Per Unit	D Curve CAT Nos.	M.R.P. (₹) Per Unit
<b>Single Pole</b>					
80A	1.5	AU15S10803C	1970	AU15S10803D	2085
100A	1.5	AU15S11003C	2205	AU15S11003D	2340
125A	1.5	AU15S11253C	2375	AU15S11253D	2530




<b>Two Pole</b>					
80A	3	AU15S20803C	4360	AU15S20803D	4635
100A	3	AU15S21003C	4655	AU15S21003D	4945
125A	3	AU15S21253C	5120	AU15S21253D	5430



<b>Three Pole</b>					
80A	4.5	AU15S30803C	6885	AU15S30803D	7305
100A	4.5	AU15S31003C	7335	AU15S31003D	7785
125A	4.5	AU15S31253C	8140	AU15S31253D	8635



<b>Four Pole</b>					
80A	6	AU15S40803C	8990	AU15S40803D	9522
100A	6	AU15S41003C	9350	AU15S41003D	9925
125A	6	AU15S41253C	10580	AU15S41253D	11225



## RCCBs (Residual Current Circuit Breakers) : Type-Adi (with added immunity)

### Range Highlights

- Wide Range of Current Ratings - 25A to 100A
- Precise Sensitivities for variety of applications - from 30mA to 300mA
- 2P & 4P versions
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories



Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>2P Adi</b>				
25A	30mA	2	AURAD202503	5220
	100mA	2	AURAD202510	5460
	300mA	2	AURAD202530	5460
40A	30mA	2	AURAD204003	5545
	100mA	2	AURAD204010	5630
	300mA	2	AURAD204030	5630
63A	30mA	2	AURAD206303	5710
	100mA	2	AURAD206310	5825
	300mA	2	AURAD206330	5825
100A	30mA	2	AURAD210003	6650

Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>4P Adi</b>				
25A	30mA	4	AURAD402503	5915
	100mA	4	AURAD402510	6030
	300mA	4	AURAD402530	6030
40A	30mA	4	AURAD404003	6135
	100mA	4	AURAD404010	6245
	300mA	4	AURAD404030	6245
63A	30mA	4	AURAD406303	6295
	100mA	4	AURAD406310	6425
	300mA	4	AURAD406330	6425
100A	30mA	4	AURAD410003	8500
	300mA	4	AURAD410030	8500

# RCBOs (Residual Current Breaker with Overcurrent Protection)

## Range Highlights

- Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- Available in
  - Type AC- For standard installations
  - Type Adi- For installations with presence of pulsating DC along with transients and harmonics
- Wide Range of Current Ratings - 6A to 63A
- Precise Sensitivities for a variety of applications - from 10mA to 300mA
- 2P & 4P versions
- Suitable for Isolation
- Protection Degree - IP 20
- Availability of wide Range of Site Mountable Accessories



## Type-AC

Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>2P AC</b>				
6A	10mA	2	AUF3C200601	3605
	30mA	2	AUF3C200603	3605
	100mA	2	AUF3C200610	3685
	300mA	2	AUF3C200630	3705
10A	10mA	2	AUF3C201001	3605
	30mA	2	AUF3C201003	3605
	100mA	2	AUF3C201010	3685
	300mA	2	AUF3C201030	3705
16A	30mA	2	AUF3C201603	3605
	100mA	2	AUF3C201610	3685
	300mA	2	AUF3C201630	3705
20A	30mA	2	AUF3C202003	3605
	100mA	2	AUF3C202010	3685
	300mA	2	AUF3C202030	3705
25A	30mA	2	AUF3C202503	3605
	100mA	2	AUF3C202510	3685
	300mA	2	AUF3C202530	3705
32A	30mA	2	AUF3C203203	3605
	100mA	2	AUF3C203210	3685
	300mA	2	AUF3C203230	3705
40A	30mA	2	AUF3C204003	3605
	100mA	2	AUF3C204010	3685
	300mA	2	AUF3C204030	3705
63A	30mA	4	AUF3C206303	4625
	100mA	4	AUF3C206310	4900
	300mA	4	AUF3C206330	4940

Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>4P AC</b>				
16A	30mA	7.5	AUF3C401603	4185
	100mA	7.5	AUF3C401610	4675
	300mA	7.5	AUF3C401630	4770
20A	30mA	7.5	AUF3C402003	4185
	100mA	7.5	AUF3C402010	4675
	300mA	7.5	AUF3C402030	4770
25A	30mA	7.5	AUF3C402503	4185
	100mA	7.5	AUF3C402510	4475
	300mA	7.5	AUF3C402530	4605
32A	30mA	7.5	AUF3C403203	4320
	100mA	7.5	AUF3C403210	4520
	300mA	7.5	AUF3C403230	4605
40A	30mA	7.5	AUF3C404003	4385
	100mA	7.5	AUF3C404010	4655
	300mA	7.5	AUF3C404030	4700
63A	30mA	7.5	AUF3C406303	5230
	100mA	7.5	AUF3C406310	5330
	300mA	7.5	AUF3C406330	5330

## Type-Adi



Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>2P Adi</b>				
6A	30mA	2	AUF3D200603	7170
	100mA	2	AUF3D200610	7325
	300mA	2	AUF3D200630	7600
10A	30mA	2	AUF3D201003	7170
	100mA	2	AUF3D201010	7325
	300mA	2	AUF3D201030	7600

Rating	Sensitivity	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>2P Adi</b>				
16A	30mA	2	AUF3D201603	7170
	100mA	2	AUF3D201610	7325
	300mA	2	AUF3D201630	7600
20A	30mA	2	AUF3D202003	7170
	100mA	2	AUF3D202010	7325
	300mA	2	AUF3D202030	7600
25A	30mA	2	AUF3D202503	7170
	100mA	2	AUF3D202510	7325
	300mA	2	AUF3D202530	7600
32A	30mA	2	AUF3D203203	7170
	100mA	2	AUF3D203210	7325
	300mA	2	AUF3D203230	7600
40A	30mA	2	AUF3D204003	7170
	100mA	2	AUF3D204010	7325
	300mA	2	AUF3D204030	7600

## SPDs (Surge Protection Devices)

### Range Highlights

- Conforms to IEC 61643-11
- Available in Type 2 and Type 1+2
- Type 2 : Protection against indirect lightning and switching surges
  - Maximum Discharge Current - I<sub>max</sub> 40kA and 15kA
  - Protection Level Up - 1.1 kV
- Type 1+2 : Protection against direct and indirect lightning surges
  - Nominal Discharge Current - I<sub>n</sub> 20kA
  - Maximum Discharge Current - I<sub>max</sub> 50kA
  - Protection Level Up - 1.7kV

Description	Configuration	Module	CAT Nos.	M.R.P. (₹) Per Unit
Type 1+2, I <sub>max</sub> 50kA	1P+N	2	AUSP121PN50	10800
	3P+N	4	AUSP123PN50	21200
Type 2, I <sub>max</sub> 40kA	1P+N	1	AUSP021PN40	7500
	3P+N	2	AUSP023PN40	15000
Type 2, I <sub>max</sub> 15kA	1P+N	1	AUSP021PN15	6000
	3P+N	2	AUSP023PN15	11800




## Changeover Switches

### Range Highlights

- Conforms to IEC 60947-3 and IS/IEC 60947-3
- Available in 3 positions (I-O-II) with centre off position
- Utilization category AC-22A

Rating	Module	CAT Nos.	M.R.P. (₹) Per Unit
<b>Double Pole</b>			
25A	2	AUC00202500	1400
40A	2	AUC00204000	2150
<b>Four Pole</b>			
40A	4	AUC00404000	3700
63A	6	AUC00406300	4200

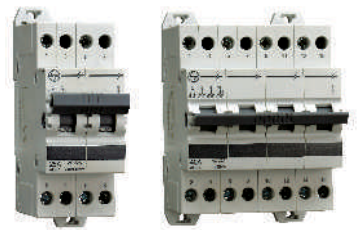

## Modular Contactors

### Range Highlights

- Wide Range of Current Ratings:
  - 25A, 40A and 63A
- Conforms to:
  - IEC/EN 61095,
  - IEC/EN 60497-4-1
  - IEC 60497-5-1
- Available in:
  - 1NO, 2NO, 3NO, 4NO
  - and 2NO+2NC version
- Protection Degree IP 20

Description (AC-1)	Module	CAT Nos.	M.R.P. (₹) Per Unit
25A-1NO	1	AUMC1002501	1340
25A-2NO	1	AUMC2002501	1670
40A-2NO	3	AUMC2004003	2870
40A-3NO	3	AUMC3004003	4010
40A-4NO	3	AUMC4004003	4800
63A-2NO+2NC	3	AUMC2206303	5100
63A-3NO	3	AUMC3006303	5200
63A-4NO	3	AUMC4006303	5720
Auxiliary Contact, 2NO	0.5	AUMCAUX240	1600



Product improvement is a continuous process. For the latest information and special applications, please contact any of our offices listed here. Product photographs shown are for representative purpose only.



Larsen & Toubro Limited, Electrical Standard Products  
Powai Campus, Mumbai 400 072

Customer Interaction Center (CIC)  
BSNL / MTNL (toll free): 1800 233 5858 Reliance (toll free): 1800 200 5858  
Tel: 022 6774 5858 Fax: 022 6774 5859 Email: cic@lntebg.com  
Web: www.lntebg.com

Regd. Office: L&T House, N. M. Marg, Ballard Estate, Mumbai - 400 001. INDIA CIN: L99999MH1946PLC004768